


BALL VALVE KPV-G, TRANSITIONAL PIECE STEEL – PE
FULL BORE, UNDERGROUND INSTALLATION, TWO SIDE DRAINAGE DN63–DN225

GAS

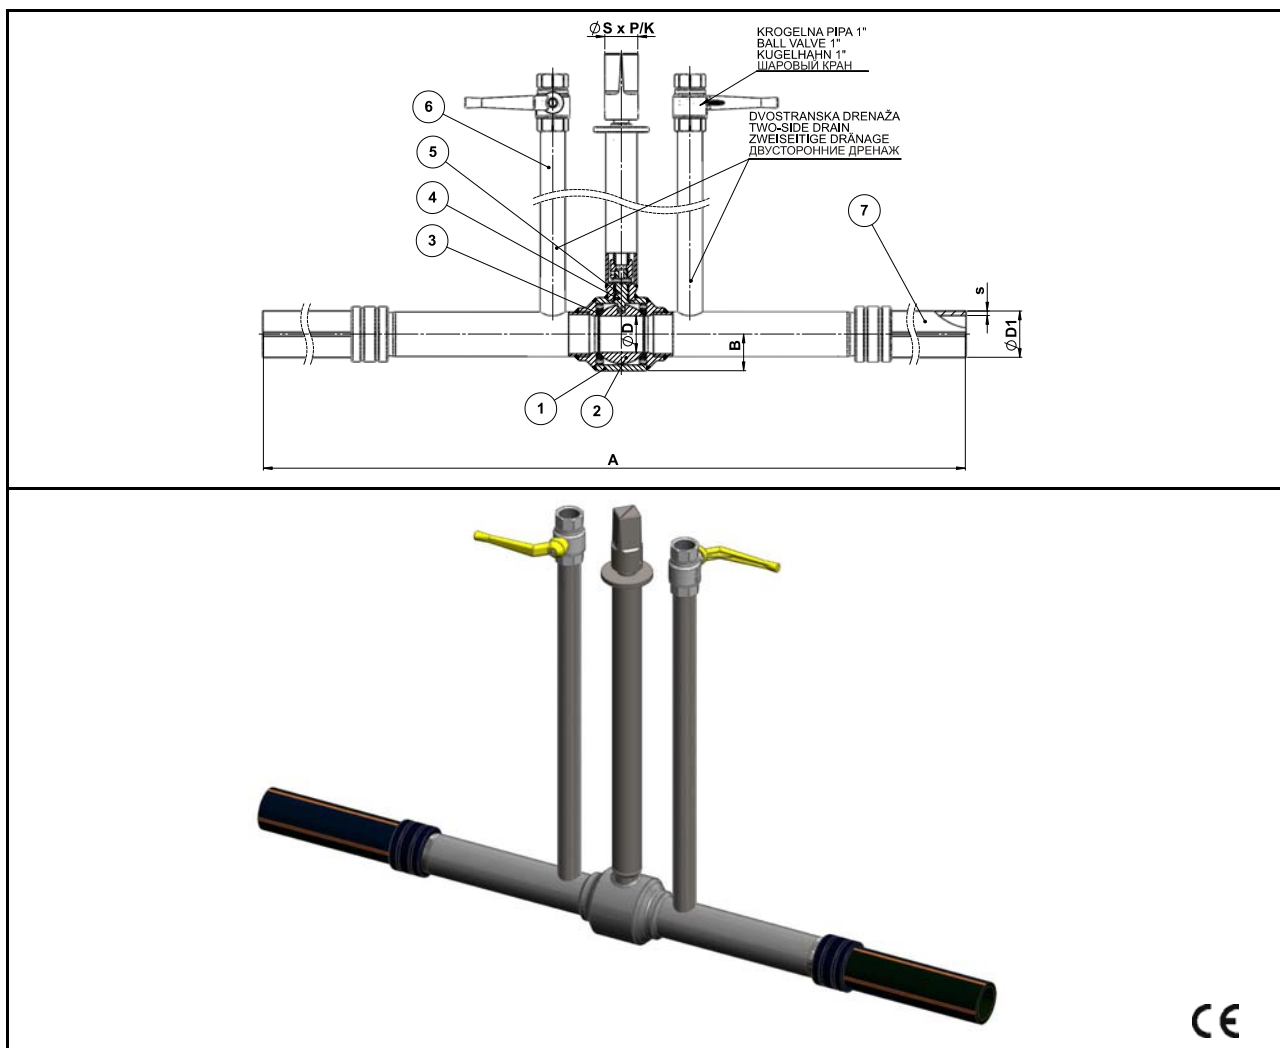

CE

Working temperature -20 °C/+60 °C

Materials

1	Body	Carbon Steel – A105, P235TR2
2	Ball	Stainless Steel – X5CrNi18-10
3	Stem	Stainless Steel – X20Cr13
4	Seats	PTFE
5	O-Ring	Viton
6	Stem extension	Carbon Steel – P235TR1, A105
7	Transitional piece	Carbon Steel / Polyethylene – PE

KPV-G DN ... PN10 DY VX PX PG0 I2

PN10

Art. nr.	DN PE Connection	DN Ball Valve	A (±20 mm)	B	ØD	ØD1	s	Shaft ØSxP/K	Weight (kg)
A905478	63	50	1130	50	50	60,3	5,8	18x14	20,60
A905558	75	65	1165	65	63,5	76,1	6,8	23x19	27,60
A905479	90	80	1180	75	78	88,9	8,2	23x19	35,40
A905431	125	100	1210	93	99	114,3	11,4	23x19	53,00
A905432	180	150	1580	135	149	168,3	16,4	K30	114,40
A905482	225	200	1660	176	200	219,1	20,5	K30	178,20

☐ TRUNION MOUNTED BALL

Notes

Antistatic and fire safe design. DN65 to DN200 with spring loaded washers.

