


GATE VALVE – RESILIENT SEATED – FLAT BODY – NON RISING STEM – F4 DN40–DN500

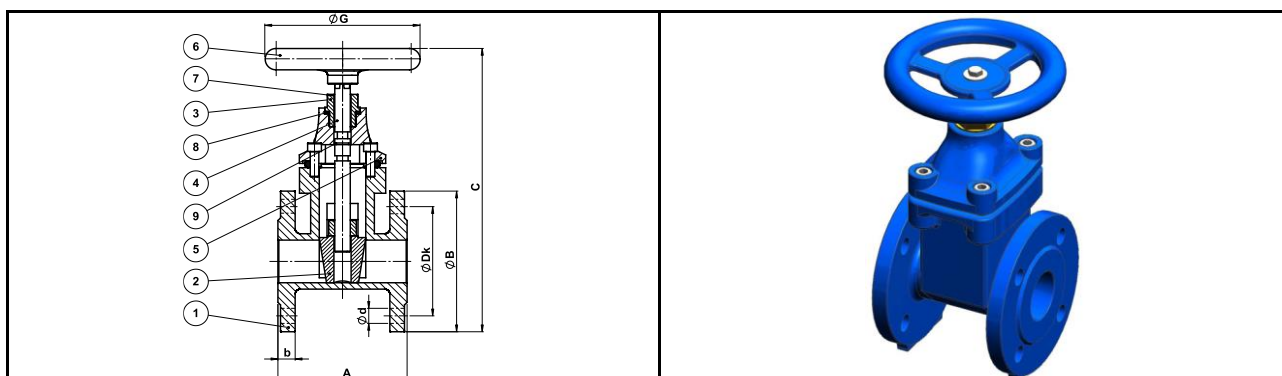

Working temperature 0 °C/70 °C

Materials

1	Body	Ductile Iron – GGG50
2	Wedge	Ductile Iron – GGG50 with EPDM coating
3	Stem nut	Brass
4	Stem	Stainless Steel – A304
5	Bonnet	Ductile Iron – GGG50
6	Handwheel	Ductile Iron – GGG50
7	Dust ring	EPDM
8	Sealing	NBR
9	O-Ring	NBR

PN10

Art. nr.	DN	A	ØB	ØDk	C	ØG	b	n-Ød	Weight (kg)
A030782	40	140	150	110	315	160	18	4–18	11,0
A012221	50	150	165	125	322	180	20	4–18	13,0
A018900	65	170	185	145	367	180	20	4–18	16,0
A012222	80	180	200	160	400	200	20	8–18	19,0
A011867	80*	180	200	160	400	200	20	4–18	19,0
A012223	100	190	220	180	440	250	22	8–18	28,0
A018901	125	200	250	210	585	280	22	8–18	44,0
A012224	150	210	285	240	602	280	22	8–23	46,0
A034755	200	230	340	295	690	340	24	8–23	80,0
A043875	250	250	405	350	822	400	26	12–22	107,0
A043876	300	270	460	400	935	400	26	12–22	155,0
A045449	350	290	520	460	1090	450	30	16–23	230,0
A045450	400	310	580	515	1180	450	30	16–28	260,0
A045451	500	350	715	620	1407,5	600	30	20–28	470,0

PN16

Art. nr.	DN	A	ØB	ØDk	C	ØG	b	n-Ød	Weight (kg)
A030782	40	140	150	110	315	160	18	4–18	11,0
A012221	50	150	165	125	322	180	20	4–18	13,0
A018900	65	170	185	145	367	180	20	4–18	16,0
A012222	80	180	200	160	400	200	20	8–18	19,0
A011867	80*	180	200	160	400	200	20	4–18	19,0
A012223	100	190	220	180	440	250	22	8–18	28,0
A018901	125	200	250	210	585	280	22	8–18	44,0
A012224	150	210	285	240	602	280	22	8–23	46,0
A018902	200	230	340	295	690	340	24	12–23	80,0
A018903	250	250	405	355	822	400	26	12–27	107,0
A029124	300	270	460	410	935	400	28	12–27	155,0
A032392	350	290	520	470	1350	450	28	16–27	230,0
A045452	400	310	580	525	1180	450	30	16–31	260,0
A045453	500	350	715	650	1407,5	600	30	20–34	470,0

Notes

Face to face dimensions conform to DIN3202 F4.

Article numbers for DN40–DN150 are the same for PN10 and PN16 and are always declared as PN16.

*Special: available with 4 holes on flanges.

