


WAFER DOUBLE DISC CHECK VALVE **DN50–DN600**

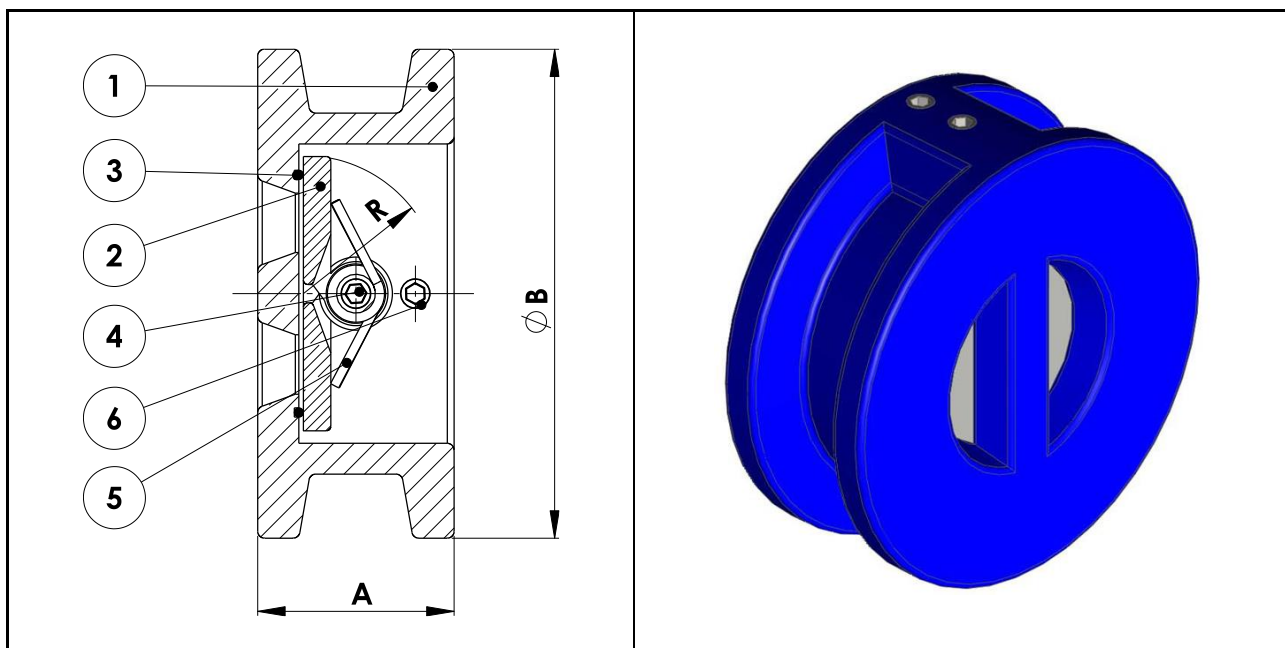

Working temperature 0 °C/100 °C

Materials

1	Body	Cast Iron – GG25
2	Disc	Stainless Steel – A304
3	Seat gasket	EPDM
4	Axle	Stainless Steel – A304
5	Spring	Stainless Steel – A304
6	Seal	EPDM

PN16

Art. nr.	DN	A	ØB	R	Weight (kg)
A031276	50	43	109	28,8	1,50
A031284	65	46	129	36,1	2,24
A031281	80	64	144	43,4	3,50
A031280	100	64	164	52,8	4,60
A031279	125	70	194	65,7	6,50
A031278	150	76	220	78,6	8,80
A031277	200	89	275	104,4	15,50
A032387	250	114	330	127,0	22,00
A032391	300	114	380	147,0	30,00
A044865	350	127	440	172,4	48,00
A044866	400	140	491	197,4	65,00
A044867	450	152	541	217,8	78,00
A044868	500	152	600	241,0	110,00
A044869	600	178	698	295,4	157,00

Notes

DN50–DN300 suitable also for installation between flanges drilled according to PN10.

